



bajadesigns®

The Scientists of Lighting

LP9

LP6

32-0001, 32-0003, 32-0011, 32-0013, 33-0001, 33-0011

35-0001, 35-0003, 35-0011, 35-0013

27-0001, 27-0003, 27-0011, 27-0013



185 Bosstick Boulevard • San Marcos • CA • 92069

Phone 760-560-2252 • Fax 760-560-0383

info@bajadesigns.com • www.bajadesigns.com



baja designs[®]
The Scientists of Lighting

LIMITED LIFETIME WARRANTY

Baja Designs proudly offers a LIFETIME WARRANTY against manufacturer's defect on all of the products that we manufacture.

These are comprehensive warranties; other than the exclusions below – you're covered. If your LED or HID bulb burns out, you're covered. Additionally, cutting off our connector or changing your lenses does not automatically void your warranty.

Exclusions:

Installation errors, abuse, misuse or crash damage. You must be the original owner of the product and can supply proof of purchase.

Baja Designs manufactures its own products as well as resells products manufactured by others. Baja Designs makes no express or implied warranties on products not manufactured by Baja Designs including without limitation any warranties or merchantability and fitness for a particular purpose. We will however, pass on all warranties made by the manufacturer, who has sole responsibility for performing such warranties.

Baja Designs will pay the freight if your product is less than 90 days old, otherwise defective products must be returned to Baja Designs, Inc., freight prepaid. At our option, we will repair or replace items in question and return them at no charge. If the identical product is no longer available, we will replace with a similar product of equal value. Baja Designs Inc. will not be responsible for any indirect or consequential damages in connection with defective merchandise.

Items purchased through a Baja Designs authorized dealer must be returned through the dealer. Only available on LED auxiliary lights and product must be in sellable condition at MSRP. Product that has been damaged in any way after the original purchase date will be excluded from this guarantee

Indemnification:

Buyer hereby acknowledges off-roading, racing and driving at night are dangerous activities and that the products and/or supplies purchased from Baja Designs are used in an inherently dangerous activity that may endanger life and limb; and in no event shall the seller, or seller's heirs and assigns, be held liable for consequential damages, nor shall seller's liability on any claim for damages arising out of or connected with the sale, delivery, or use of purchased products and/or supplies exceed the purchase price of the products and/or supplies.



baja designs
The Scientists of Lighting

LP9/LP6 Mounting Instructions



- 1) Begin by removing the light and bracket from the box and orientate them as shown in the picture above.
- 2) Locate the $\frac{1}{4}$ "-20 and $\frac{3}{8}$ " hardware in the provided hardware pack, placing the center $\frac{3}{8}$ " bolt, two $\frac{1}{4}$ "-20 bolts, and associated washers through the bottom of the bracket as shown in the picture above. Do not fully tighten the lower mounting bracket hardware until after the light has been aligned.
- 3) Mount the bracket to the light using the remaining $\frac{1}{4}$ "-20 hardware as shown in the picture above.




baja designs
The Scientists of Lighting

Lens Swap Instructions (uService):

- When installing a different lens simply remove the 6 (LP9) or 4 (LP6) bolts using a 4mm allen wrench on the back of the light.
- Carefully remove the front bezel and lens.
- Make sure the o-ring is properly fitted in the o-ring groove of the housing when installing the new lens. The o-ring is not directional, although the shape has been designed to match the housing profile groove.
- Once you have ensured the o-ring, lens and bezel have been properly seated begin tightening the 6 (LP9) or 4 (LP6) bolts. The bezel hardware should be torqued to 7 ft./lb. in a “criss-cross” pattern.


LP9/LP6 Pro & Racer Edition

Wiring Instructions

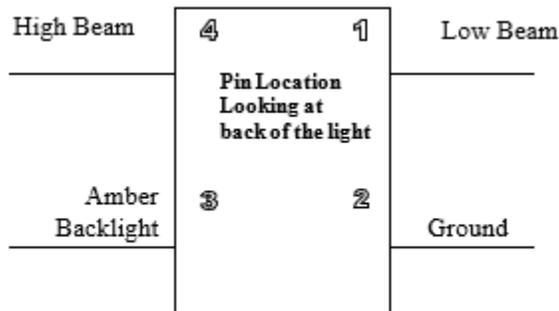

LP9/LP6 Sport

Wiring Instructions

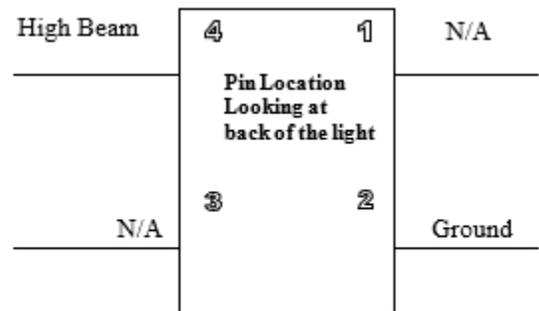

- LP6 & LP9 Operating Voltage: 12-36 Volts.
- Low beam, High Beam and Amber Back Light function off positive current.
- **Do NOT power pins 1 and 4 at the same time.** This may cause damage to the circuit board!
- If you are creating your own wiring harness the mating connector for the back of the light is a Deutsch Connector with part number DT06-4S. When you wire the light, you cannot supply power to the low beam (pin 1) & the high beam (pin 4) at the same time. **Use a three position toggle switch (on/off/on) that is single pole, double throw. In one of the on position's it will supply power to the low beam. In the opposite on position it will supply power to the high beam. Custom wire harnesses must be made**




bajadesigns
The Scientists of Lighting

- with 12 gauge wire for pins 1, 2, & 4. Pin three must use a minimum of 16 gauge wire. If the minimum size wire is not used, fire or damage to the light may occur.

We highly recommend the use of our 64-0172, LP9 Pro Wire Harness to safely power up to two lights at a time. The 64-0172 includes switch, relay, connectors and ample lengths of wire for a full size vehicle.

LP9 Wire Harness Schematic

Hella Relay
PN: 4RD 933 332-18

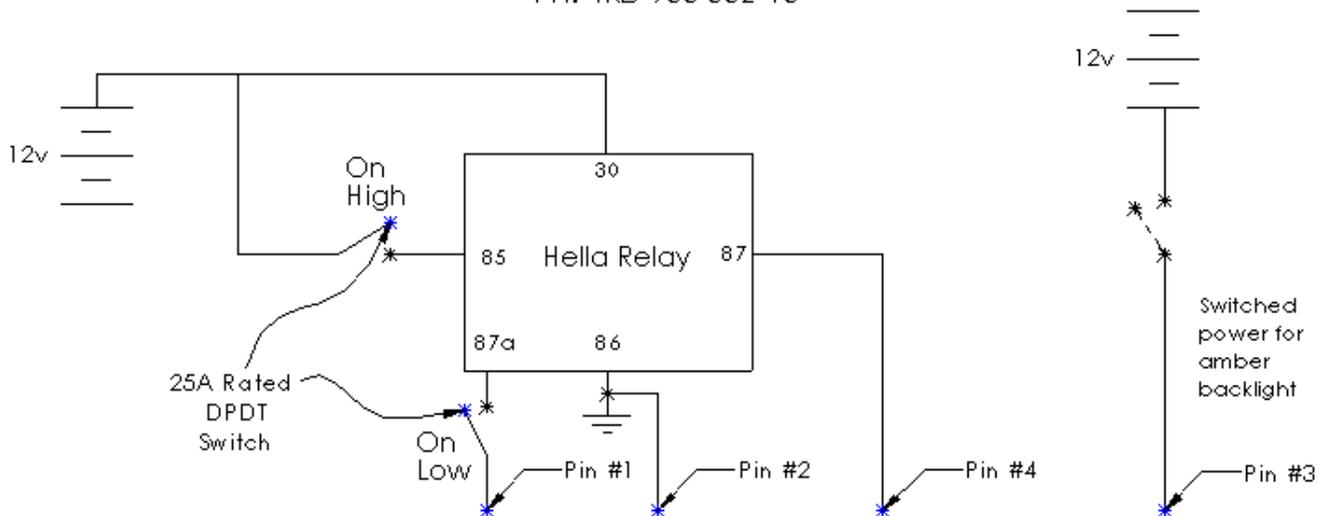

4 Pin Connector

